ISL TECHNOLOGIES PTE LTD
E: info@conevalve.com.sg
W: www.conevalve.com
Co.Reg.No: 200208690W

IBC Fill Head (Manual)

APPLICATION: Designed to ensure a dust-free transfer of product from process line into an IBC.

DESCRIPTION: The ISL Fill Head is installed at the point where the product is being transferred from the process line into an IBC. The Fill Head has a cyclonic design and when paired with an appropriate dust collector system, ensures maximum dust containment.

The Fill Head is operated manually and when lowered, will cover the inlet of the IBC. It has an integrated vent pipe to exhaust the displaced air from the IBC as the powder is loaded.

INDUSTRY: Food, Pharma, Chemical & Others

MEDIA: Powder, Granules, & Pellets

MATERIAL OF CONSTRUCTION:

Contact parts: Stainless Steel 304 or 316/316L.

Non-Contact Parts: Stainless Steel 304.

Elastomers: Silicone
All elastomers are food grade & FDA-compliant.

Fasteners: Stainless steel or mild steel

Fittings: Nickel-plated brass with Co-polymer sleeve



MOUNTING CONNECTION: Stud Bolts


(Mounting connection can be customised to suit client's requirement)


DIMENSION: (L x W x H) 580 mm x 580mm x 435 mm (21.65 in x 21.65 in x 22.83 in)

NETT WEIGHT: ~26 kg (57.33 lbs)

ISL TECHNOLOGIES PTE LTD
E: info@conevalve.com.sg
W: www.conevalve.com
Co.Reg.No: 200208690W

General Drawing - IBC Fill Head

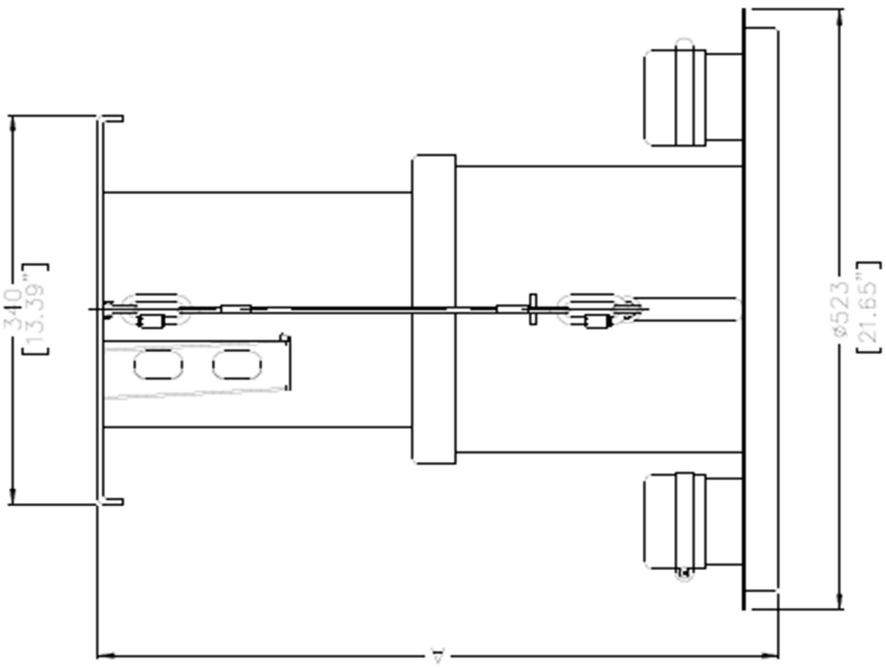

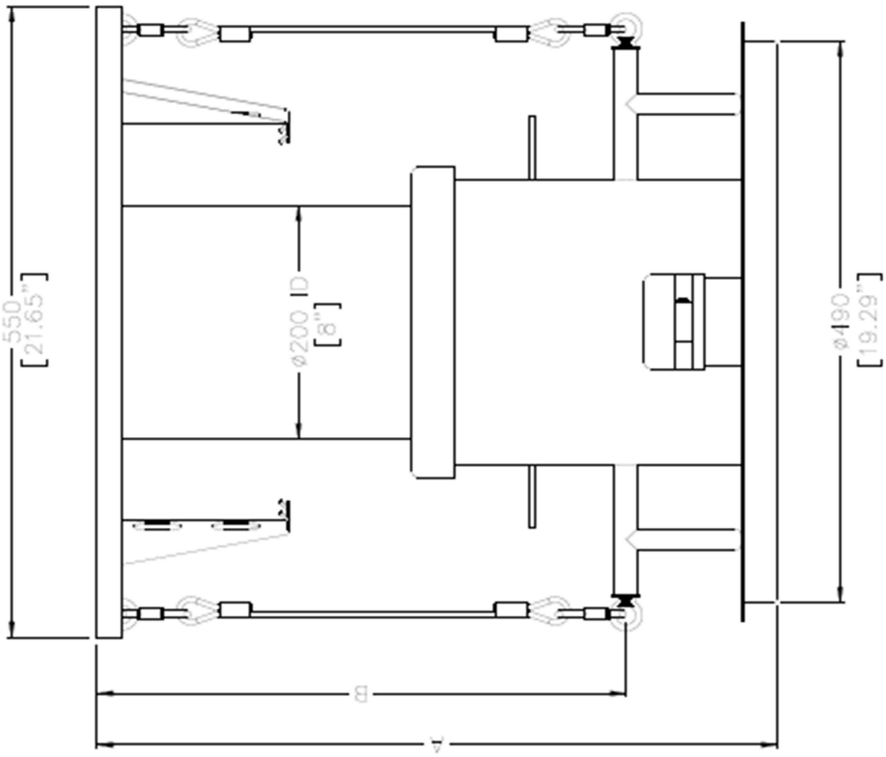

S/No.	Description	Stroke	A	B	Weight
1	FH 200	200 (7.87")	580 (22.83")	435 (17.13")	26 KG (57.33LB)

51 Ubi Ave 1 # 01-19 Paya Ubi Industrial Park, Singapore 408933 O: +65 6343 1911 F: +65 6343 1123